



LEAGUE SOUND


RIC





White open dome: standard
 Black close dome: optional

Fitting Range

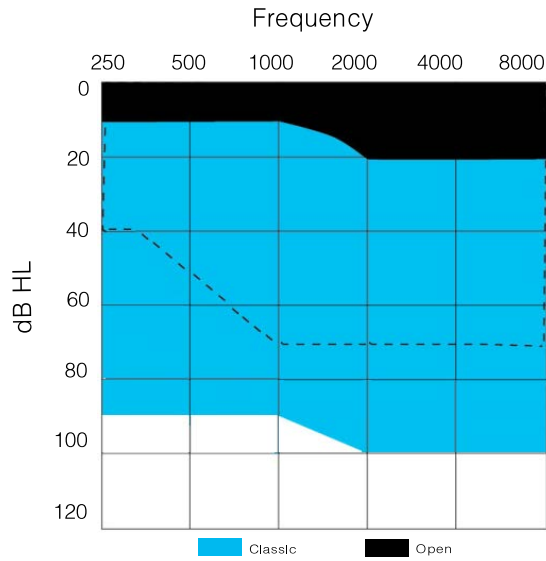

Feature Comparison

S/N	BON	BON 4	BON 6	BON 8	BON 12	BON 16
Model	A487N	K387	K587	A687	A887	A487
Exquisitely well-fit	●	●	●	●	●	●
Channel	4	4	6	8	12	16
Band	8	8	8	12	16	16
Adaptive Directionality				○	○	○
Auto Adaptive Directionality				○	○	○
Intelligent Switch among Different Occasions				●	●	●
Real-time Data Analysis System				●	●	●
Built-in Audiometer				●	●	●
Self Learning				●	●	●
Fixed Directionality		○	○	○	○	○
Instantaneous Noise Blocking System		●	●	●	●	●
Built-in Tinnitus Masker		●	●	●	●	●
DFC	●	●	●	●	●	●
Program	4	4	4	4	5	6
Autophone Program	○	○	○	○	○	○
Expansion	●	●	●	●	●	●
Power on Delay	●	●	●	●	●	●
Low Battery Indicator	●	●	●	●	●	●
Start Up Indicator	●	●	●	●	●	●
Bluetooth	○	○	○	○	○	○

●: Standard ○: Optional

Test Standard: IEC 60118-7

Technical Specification	UNIT	VALUE	
		Regular Power	Powerful RIC
SSPL90	dB SPL	112	120
HFA-SSPLA90	dB SPL	107	117
MAX GAIN	dB	40	58
HFA Full-on Gain	dB	35	50
Frequency Range	Hz	200 ~ 6100	200 ~ 6700
THD	%	500 Hz: 1.5 %	500 Hz: 2.5 %
		800 Hz: 0.4 %	800 Hz: 1.6 %
		1600 Hz: 0.2 %	1600 Hz: 0.2 %
Equivalent Input Noise Level	dB	22	24
Battery Current	mA	0.8	1.1
Attacking Time	ms	8	48
Releasing Time	ms	26	87

Accessory:

- 312 Battery
- Program Switch
- CS63 Programming Cable
- Beige and Black Color Available